



Acoustic Treatment Pack



BASSKEEPER® WALL

Tuned Absorption

BASSKEEPER® WALL is the newest ATP® solution for absorption of low frequencies to mount on walls and ceilings.

When combined with the BASSKEEPER® ANGLE, it provides the best ATP® choice among the low-frequency products.

This bass trap is a 120Hz tuned resonance open box model like the BASSKEEPER® ANGLE and you can match them. These two products together provide a true linear tool and a first class approach to tame low frequencies and take perfect control of the basses.

In most situations these two models solve all serious low-end problems in the room.

Several colours are at your disposal. They look great!



Features:


- NRC average: 0.66 / m2 [$>100\text{Hz}; <250\text{Hz}$].
- EPS Euroclass fire-retardant (NP EN 13501-1).
- Installation: glues included.
- In stock for immediate delivery.
- Very easy to install.
- Other colours available upon consultation.



Package Data:

	BKW120			
	H	W	D	Kg
2 units/box	124 cm	64 cm	31 cm	9.2
4 units/box	124 cm	64 cm	51 cm	17.5

Technical Drawing:

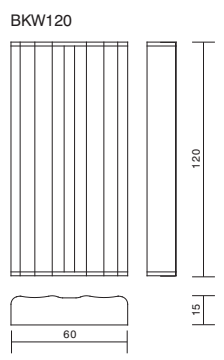

Values:

		Absorption Coefficient																							
		NRC [$>100\text{Hz}; <250\text{Hz}$]																							
Hz	50	63	80	100	125	160	200	250	315	400	500	630	800	1k	1.25k	1.6k	2k	2.5k	3.15k	4k	5k	6.3k	8k	10k	0.66
αS	0.10	0.06	0.10	0.20	0.62	0.90	0.82	0.74	0.67	0.57	0.53	0.46	0.44	0.41	0.39	0.38	0.37	0.36	0.36	0.42	0.48	0.48	0.50	0.66	0.66

— Values in accordance with the standards: EN 20654, ASTM C423 and EN 11654. ■ Non Standard values.

Model Sizes:

	H	W	D	Kg
BKW120	120 cm	60 cm	15 cm	3.1

Graphic:

